

2009-11-16

The option L1 and L2 at Renova has started up! [Up](#)

Götaverken Miljö has received the go-ahead confirmation from Renova AB to proceed with the option to upgrade flue gas cleaning lines L1 and L2 at Sävenäs municipal waste incineration plant in Göteborg. Renova took the decision after having assessed our upgrade of existing flue gas cleaning line L3, including flue gas desulfuring and gypsum system, that had turned out very well. Project planning for L1 and L2 has started and installation will take place in summer 2010 with completion at the end of 2010.



2009-07-03

AffaldVarme Århus, Denmark, has taken over the condensing plant. [Up](#)

In June last year the contract was signed with Götaverken Miljö to deliver a condensing plant including a water treatment plant to Århus. The project has been finalized earlier than the original time schedule thanks to the dedicated work carried out by all parties. On June 30 the plant was taken over by a content customer.



2009-06-15

ADIOX[®] dioxin removal to a WTE plant in the U.S. [Up](#)

Götaverken Miljö has received its first order in the U.S. to a Waste-to-Energy plant. The order for ADIOX[®] material and demisters will be supplied to an existing WTE plant operated by one of the main operators in the world. The order was approved in early June and the equipment will be installed during the summer season 2009. The order is a strategic investment for the customer to reduce dioxins in flue gas.

2009-06-05

The condensing plant in Århus now commissioned [Up](#)

The plant at AffaldVarme in Århus, Denmark, was started up in March as planned. The plant comprises two condensing scrubbers with ADIOX[®] packings including plate heat exchangers and condensate water treatment. The condensation system makes it possible to recover extra heat out of the flue gas which is transferred to the municipal district heating system. Trial run and performance test have recently been successfully carried out and the plant fulfils guaranteed performance.



2009-03-24

ACHEMA 2009 [Up](#)


On May 11-15 you can find us at the Achema 2009 exhibition in Frankfurt. Achema is one of the leading forums for process industry and environmental technology with around 3000 exhibitors. We hope that you will be able to visit us in **hall 4.1, stand G30**. We will be happy to discuss flue gas cleaning, focusing on dioxin and mercury, and how you can recover energy from flue gases in a effective way.

www.achema.de

2009-03-20

Intense erection works in Århus, flue in plastic installed [Up](#)

A flue at the height of 100 m was installed on a sunny day on March 11. The installation works are very intense now. The plastic works with installation of exterior flue gas ducts are about to be finalized. The electric and instrumental works are in a very dynamic phase approaching the start-up at the end of March. The condensing plant will supply 6 MW heat to the district heating system of Århus.

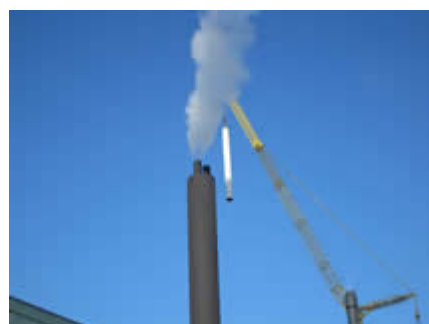

2009-01-20

Installation works are proceeding at AffaldVarme in Århus [Up](#)

The installation of new district heating pipes for connection to the new condensing plant is almost finished and most of the components are delivered. The plastic works, that is circulation piping and flue gas ducts of plastic material, were started in the beginning of 2009. Late in March the stack will be equipped with a new flue gas duct in plastic material, 100 metres of height. The project proceeds as planned and start-up will take place in the early days of April this year.

